

BANDPASS FILTER

Fo: 70.25 MHz

IMPEDANCE : 50 OHMS (IN & OUT)

INSERTION LOSS: 7 dB MAX

RIPPLE: 1.0 dB MAX $\pm$ 32.5 KHz

3dB BANDWIDTH: 130 KHz MIN

50dB BANDWIDTH: 800 KHz MAX




ULTIMATE ATTENUATION:

50 dB FROM DC to 200 MHz

45 dB FROM 200 to 400 MHz

SPURIOUS ATTENUATION: 40 dB MIN

OPERATING TEMPERATURE : -55°C to +85°C

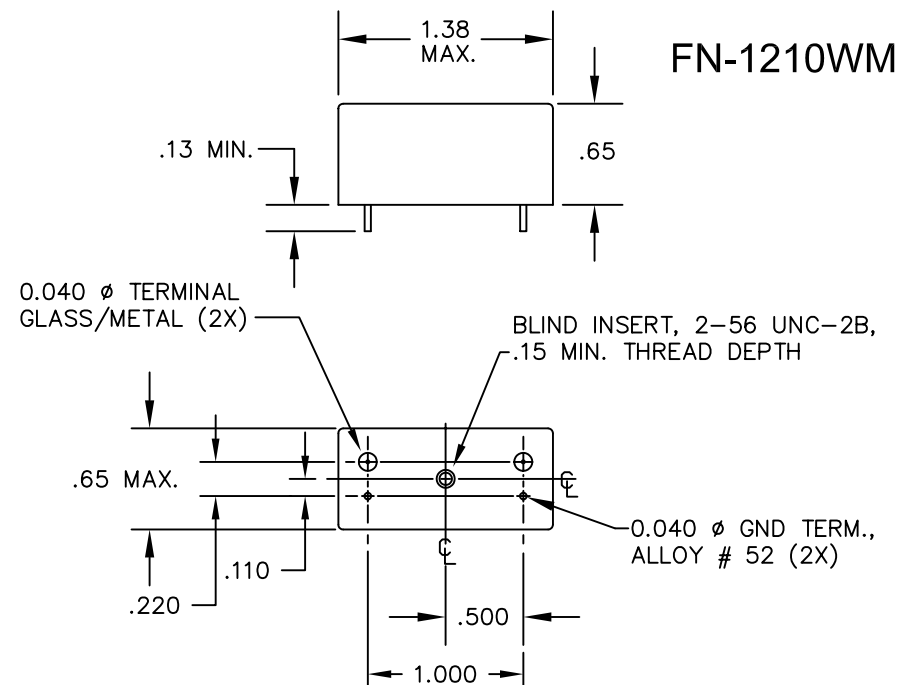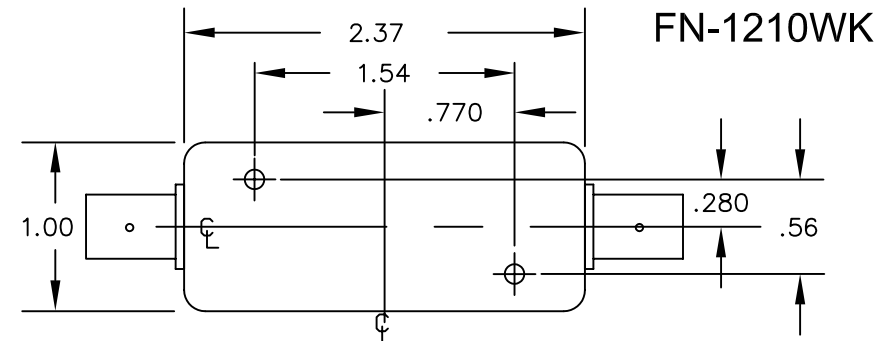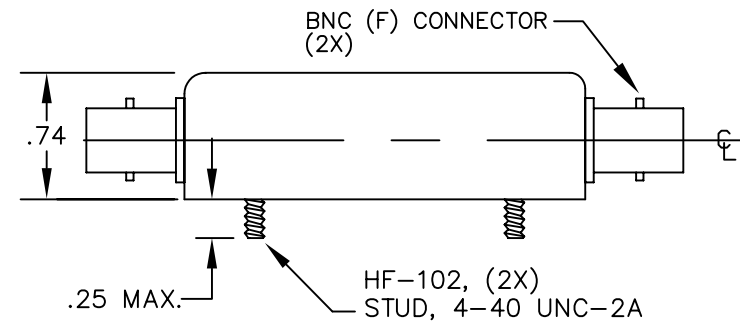

FN-1210W DRAWING SUMMARY SHEET 1 of 2

FILTRONETICS, INC.

6010 PARRETTA DR.
KANSAS CITY, MO 64120

816-231-7375

FAX 816-241-0368

WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm$ 1°

.XX = $\pm$.020

.XXX = $\pm$.010




HOLES

$\pm$.002



REVISED 02/06/12 ECO 4359

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.

FN-1210WS

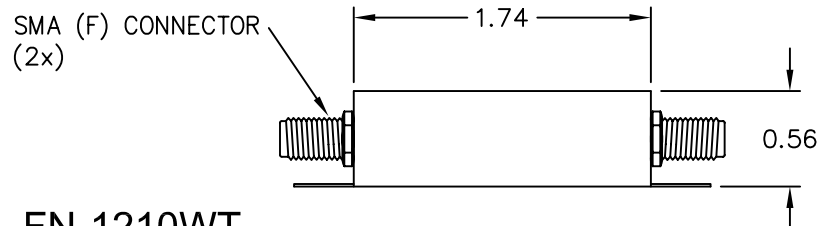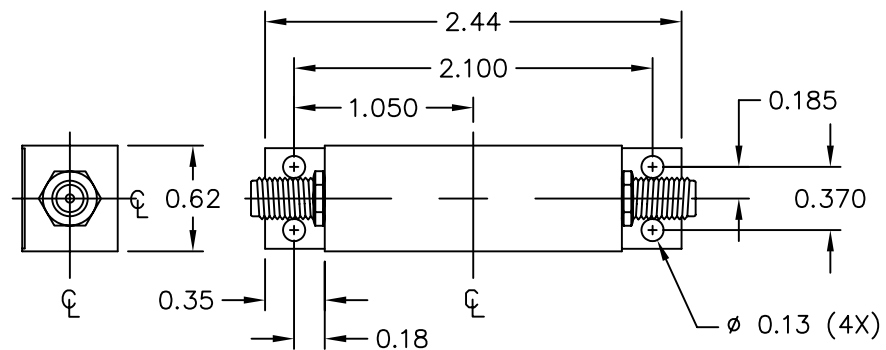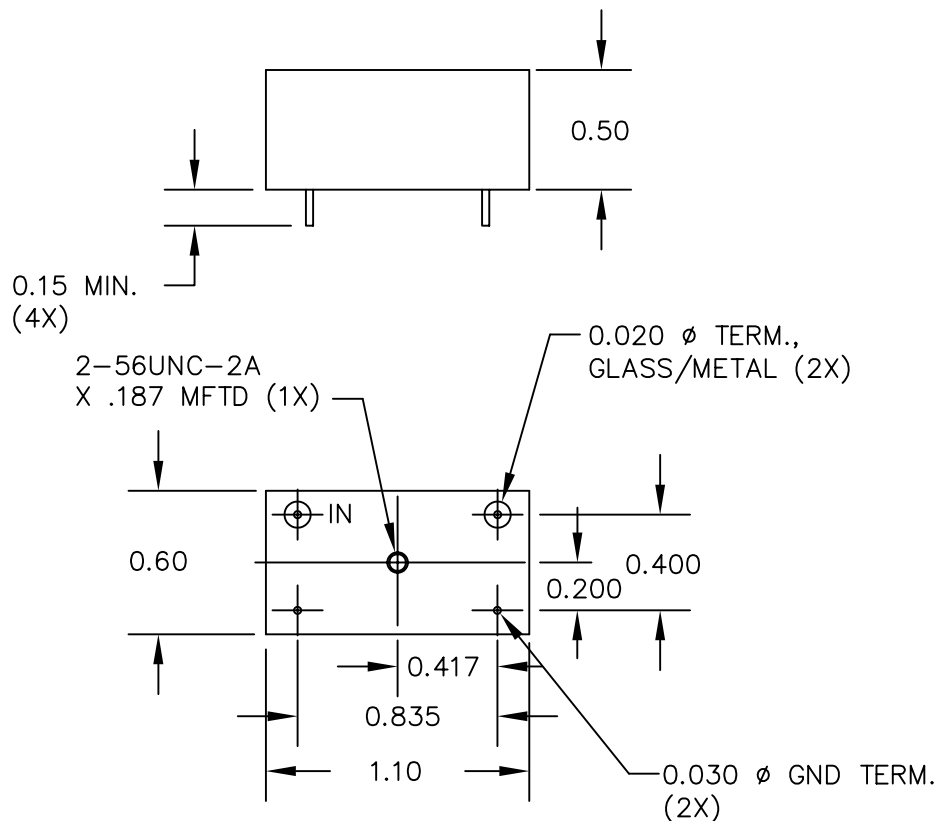

FN-1210WT

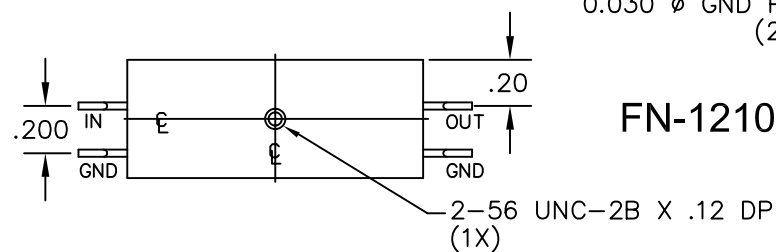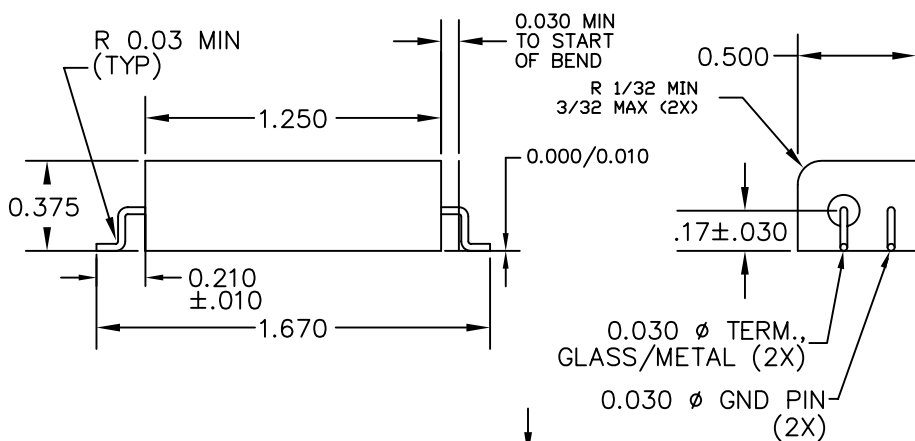

FN-1210WEE

FN-1210W DRAWING SUMMARY SHEET 2 of 2

FILTRONETICS, INC.

6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm$ 1°	HOLES
.XX = $\pm$.020	$\pm$.002
.XXX = $\pm$.010	

REVISED 02/06/12 ECO 4359