FN-171W

BANDPASS FILTER

Fo:	80 KHz
IMPEDANCE :	600 ohm IN / OUT
INSERTION LOSS:	3 dB MAX
RIPPLE:	0.25 dB MAX
3dB BANDWIDTH:	200 Hz MIN
60dB BANDWIDTH:	800 Hz MAX
OPERATING TEMPERATURE :	0°C to +50°C

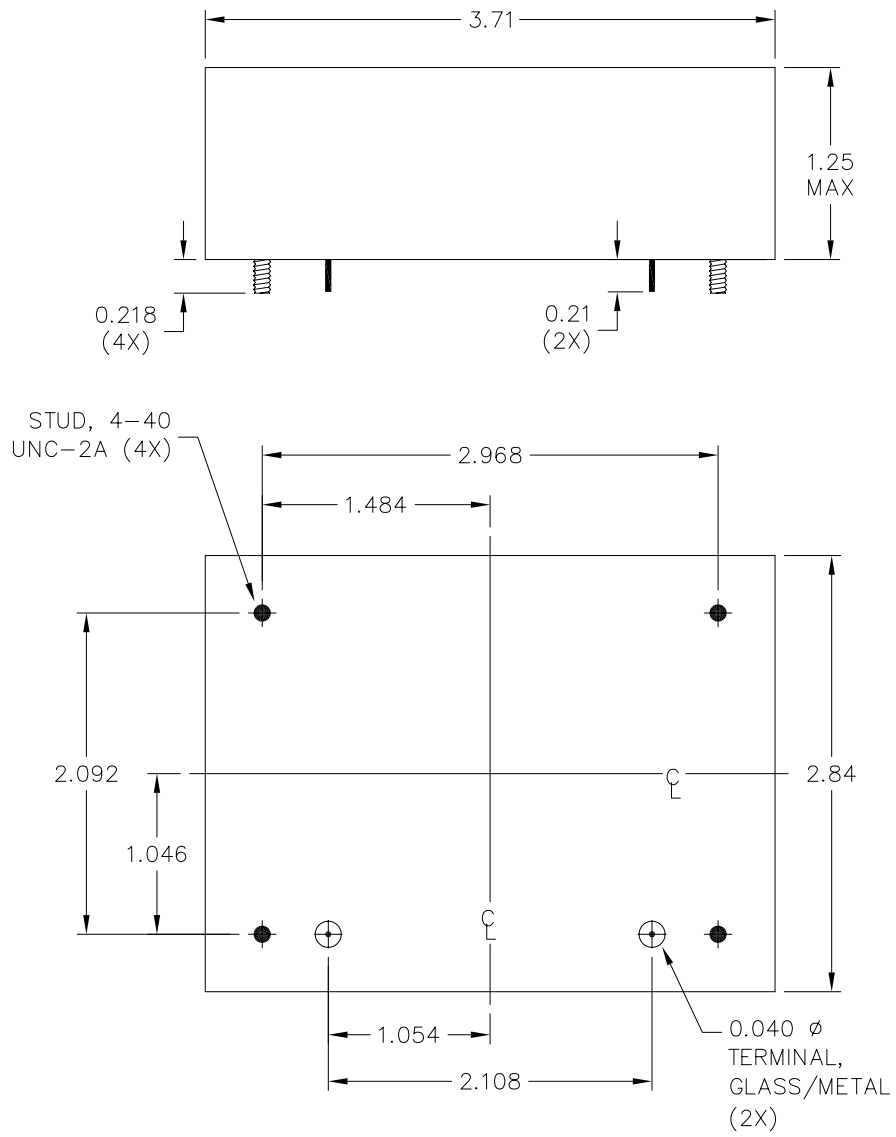

FN-171W DRAWING SUMMARY

FILTRONETICS, INC.
6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED	
ANGLE = ± 1° .XX = ± .020 .XXX = ± .010	HOLES ± .002
REVISED 9/22/03	

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.