


BANDPASS FILTER


Fo: 200.0 MHz
IMPEDANCE : 50 OHMS (IN & OUT)
INSERTION LOSS: 6.5 dB MAX
RIPPLE: 0.1 dB MAX
3 dB BANDWIDTH: ± 10 KHz MIN
40 dB BANDWIDTH: 80 KHz MAX
SPURIOUS ATTENUATION: 35 dB MIN
OPERATING TEMPERATURE : 0°C to +50°C

FN-1825W

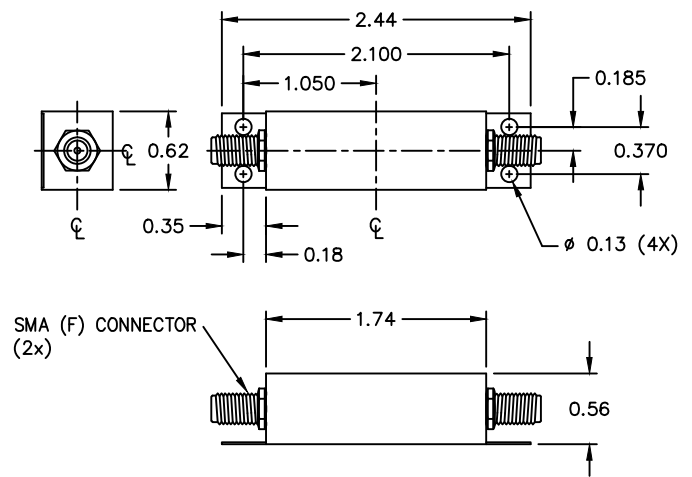


FN-1825WT

FN-1825WS

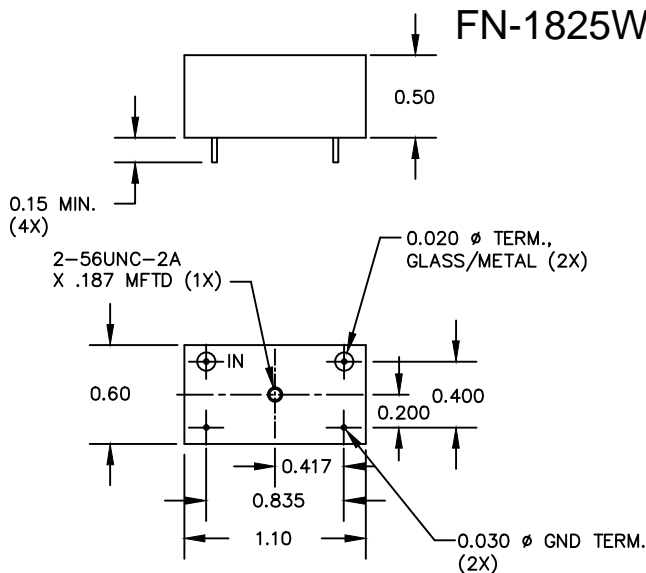

BNC (F) CONNECTOR (2X)

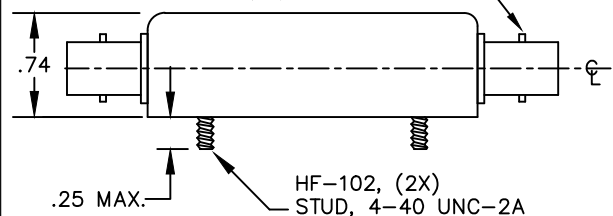

FN-1825WK

FN-1825W DRAWING SUMMARY


FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
.XXX = ± .010

ANGLE = ± 1°
HOLES = ± .002

REVISED 03/23/2012 PER ECO 4379

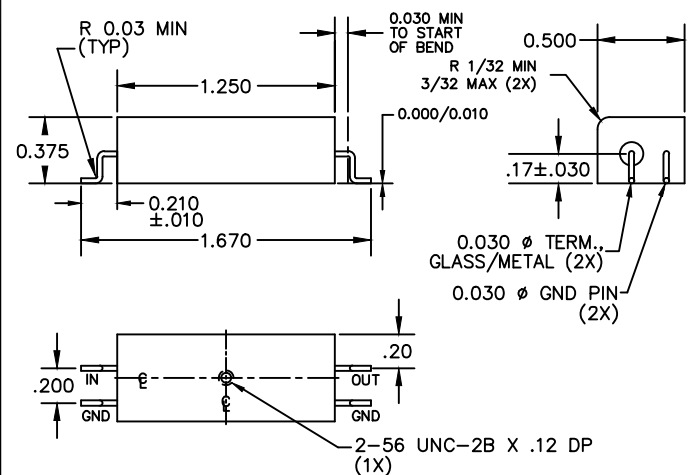

FN-1825WEE