



BANDPASS FILTER

Fo: 140.0 MHz
IMPEDANCE : 75 OHMS (IN & OUT)
INSERTION LOSS: 6 dB MAX
RIPPLE: 0.5 dB MAX
3dB BANDWIDTH: 50 KHz MIN
50dB BANDWIDTH: 250 KHz MAX
OPERATING TEMPERATURE : +15°C to +35°C


FN-1190W

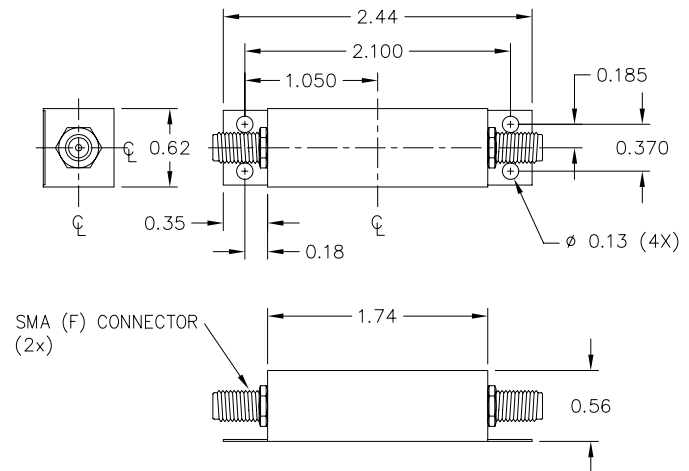

FN-1190WT

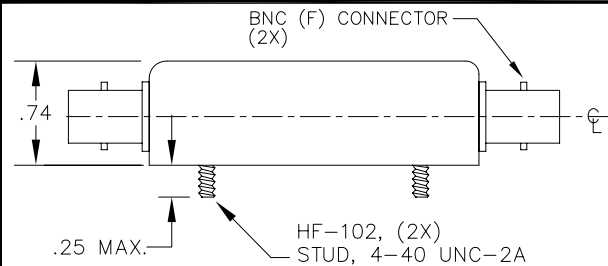


FN-1190WK

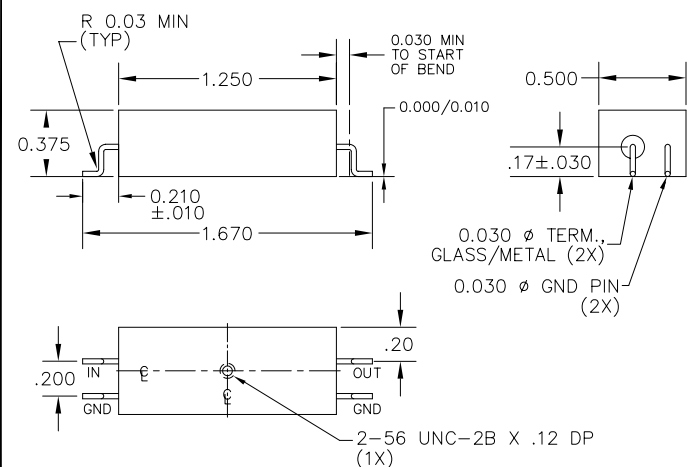

FN-1190WEE

FN-1190WS

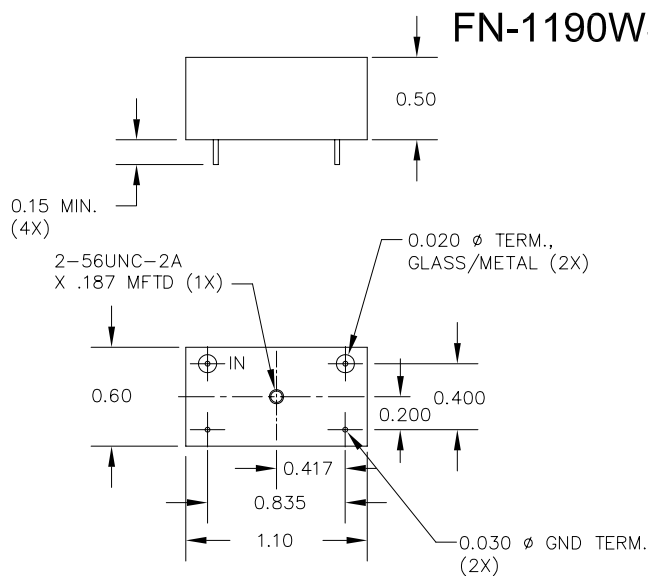

FN-1190W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = $\pm .020$
 .XXX = $\pm .010$

ANGLE = $\pm 1^\circ$
 HOLES = $\pm .002$

REVISED 8/25/03