
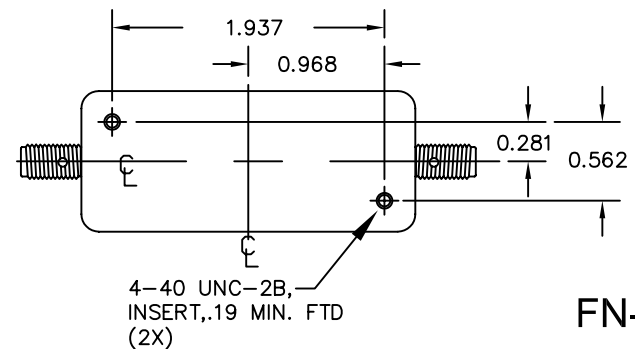
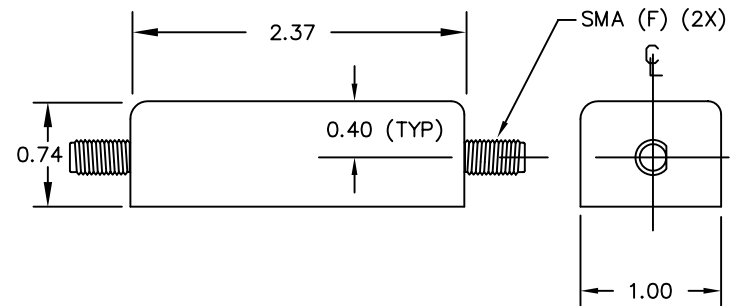


# BANDPASS FILTER

**Fo:** 15.619419 MHz NOMINAL  
**IMPEDANCE :** 50 OHMS (IN & OUT)  
**INSERTION LOSS:** 3dB MAX  
**RIPPLE:** .5dB MAXIMUM  
**3dB BANDWIDTH:** 6 KHz MINIMUM  
**RETURN LOSS@F<sub>o</sub>:** 13.9dB MINIMUM  
 (FORWARD & REVERSE)  
**60dB BANDWIDTH:** 30 KHz MAXIMUM  
**SPURIOUS ATTENUATION:** 30dB MINIMUM  
**OPERATING TEMPERATURE :** 0 to +65°C

## FN-2110W (STYLE M-3)

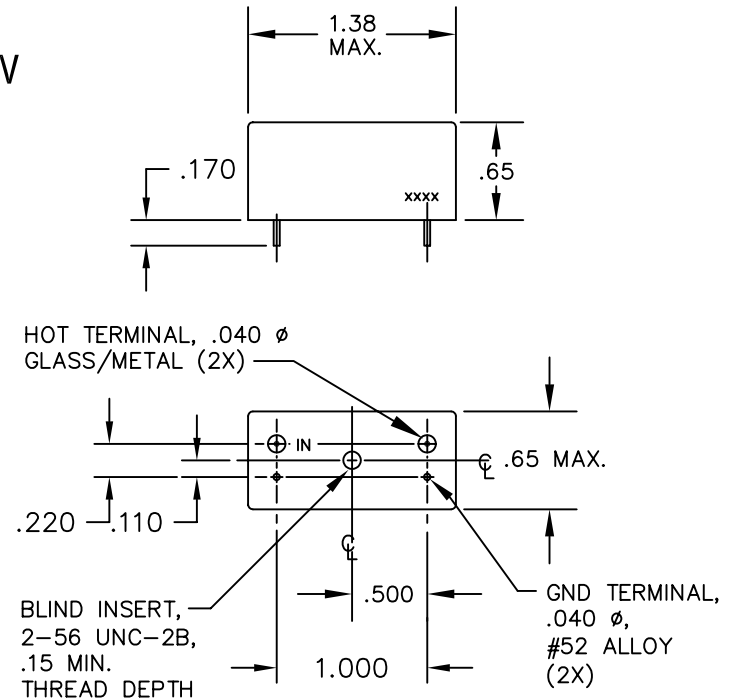

**FN-2110WJ**

### FN-2110W DRAWING SUMMARY

**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 10/12/05