



# BANDPASS FILTER


**Fo:** 140.0 MHz  
**IMPEDANCE :** 75 OHMS (IN & OUT)  
**INSERTION LOSS:** 7.0 dB MAX  
**RIPPLE:** 0.5 dB MAX  
**3dB BANDWIDTH:** 210 KHz MIN  
**50dB BANDWIDTH:** 700 KHz MAX  
**OPERATING TEMPERATURE :** +20°C to +30°C

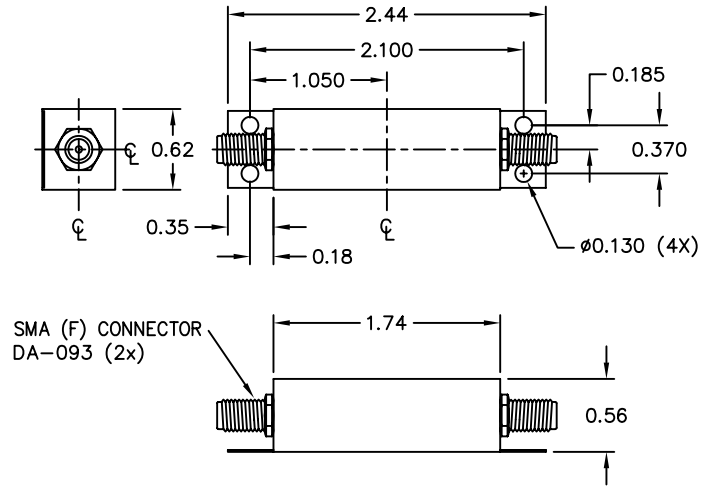

**FN-2196WT**

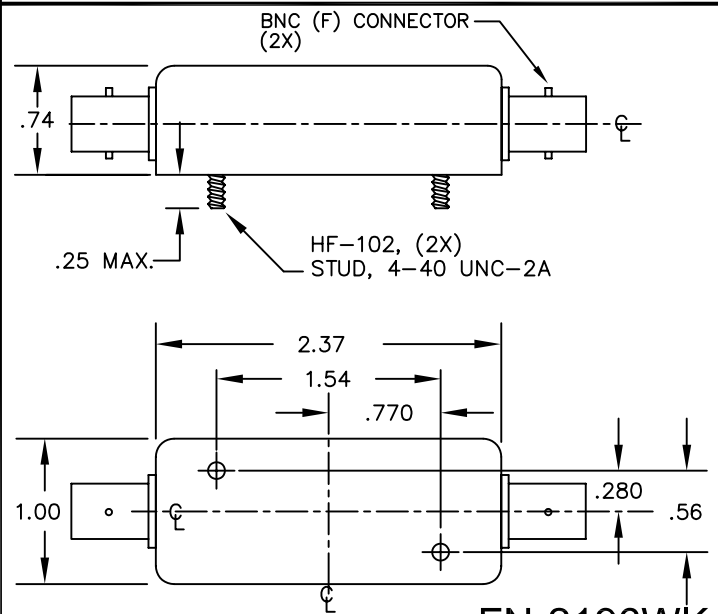

**FN-2196WK**

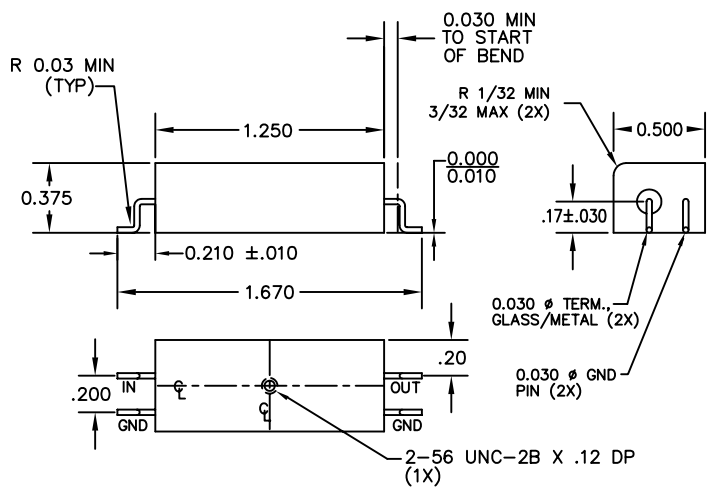

**FN-2196WEE**


## FN-2196W DRAWING SUMMARY

**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

|               |                |
|---------------|----------------|
| .XX = ± .020  | ANGLE = ± 1°   |
| .XXX = ± .010 | HOLES = ± .002 |

REVISED 03/23/2012 PER ECO 4379

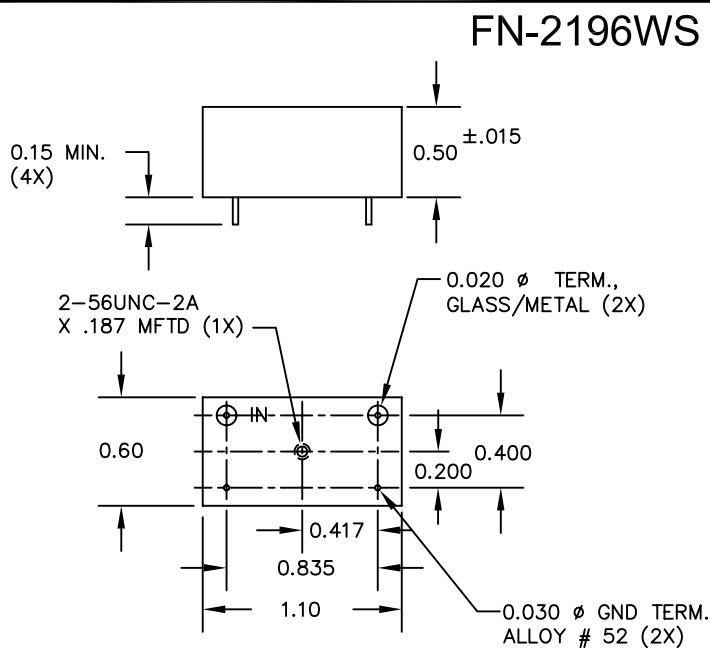

**FN-2196WS**