


BANDPASS FILTER



Fo: 75 MHz
IMPEDANCE : 50 OHM (IN/OUT)
INSERTION LOSS: 2.0 dB MAX
RIPPLE: 0.5 dB MAX
2dB BANDWIDTH: 25 MHz MIN
30dB BANDWIDTH: 35 MHz MAX
GROUP DELAY (± 12 MHz): 70 nSEC MAX VARIATION

OPERATING TEMPERATURE : -5°C to +50°C

FN-2788W

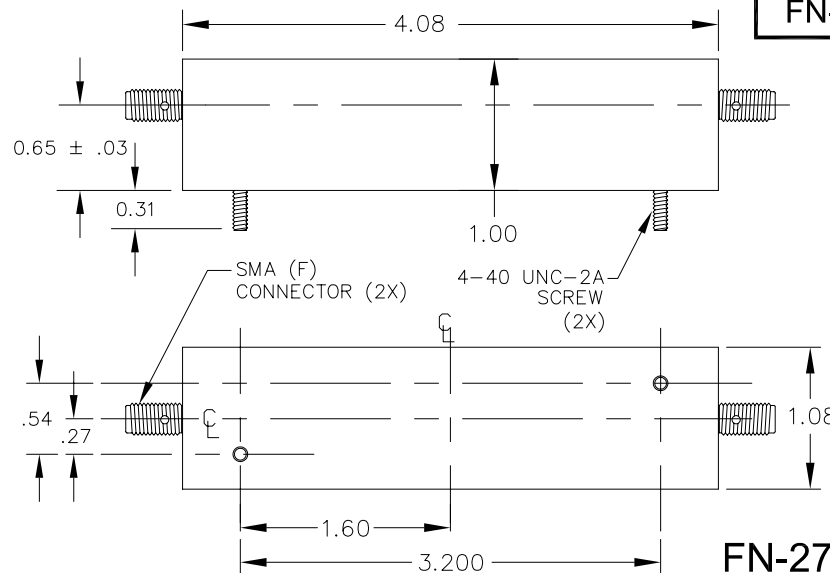

FN-2788WX

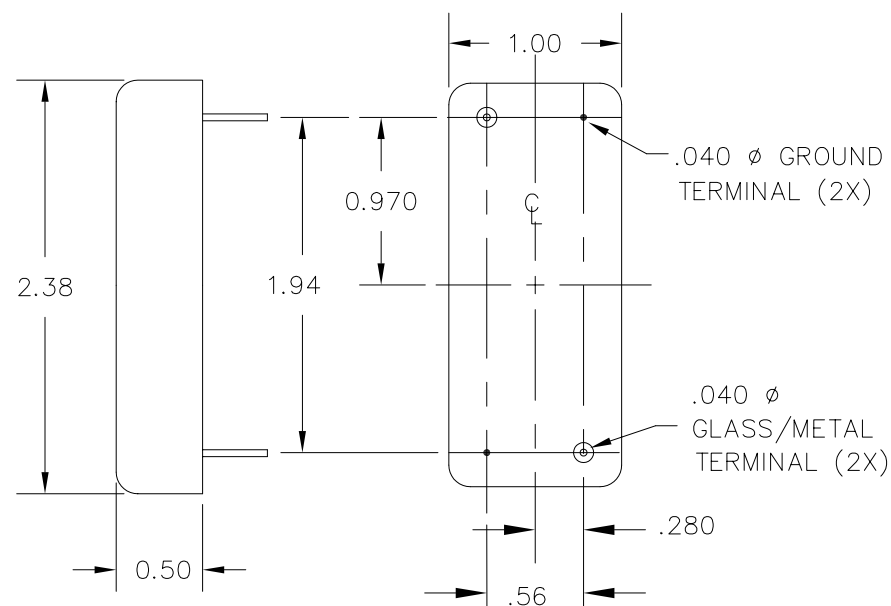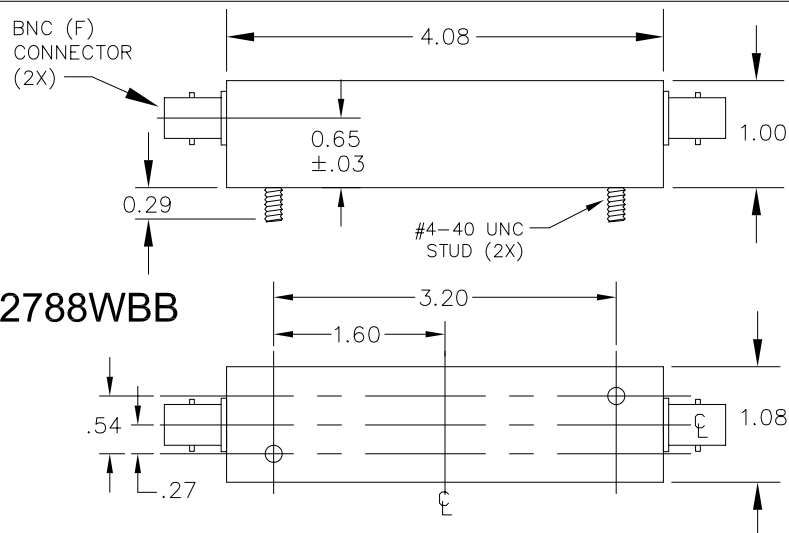

FN-2788W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 10/13/03

FN-2788W
 (STYLE B)

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.