

LOWPASS FILTER

3 dB CUTOFF: 2100 MHz MIN

40dB MIN STOPBAND: 2630 MHz to 6.5 GHz


IMPEDANCE : 50 OHMS (IN & OUT)

INSERTION LOSS: 0.25 dB MAX

RIPPLE: 0.5 dB MAX


VSWR to 1890.0 MHz: 2:1 MAX

OPERATING TEMPERATURE : -40°C to +85°C

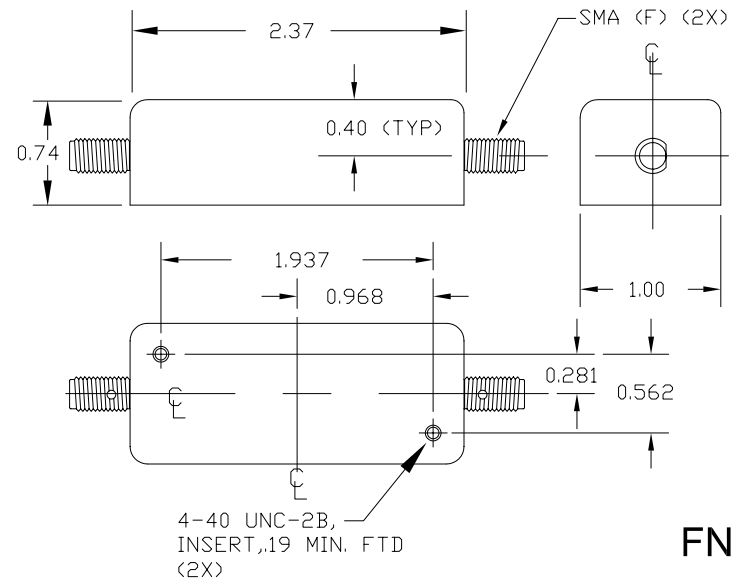

FN-3339W

FN-3339WJ

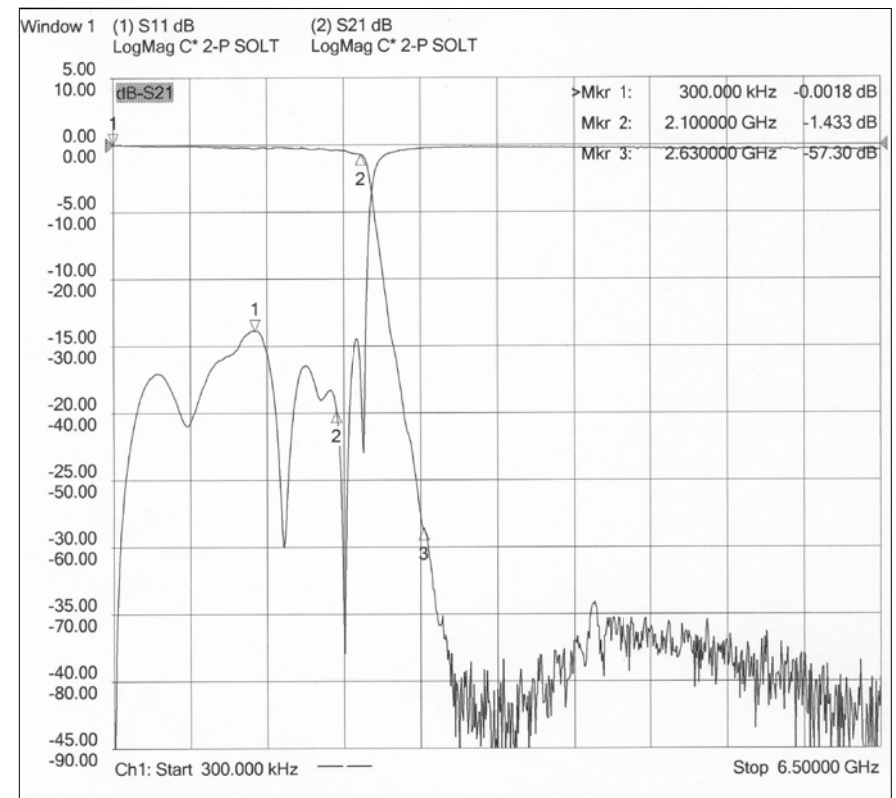

FN-3339W DRAWING SUMMARY

FILTRONETICS, INC.
6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 1/17/2005

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.