




FN-3456W

BANDPASS FILTER

Fo: 10.0 MHz
 IMPEDANCE : 50 ohms IN/OUT
 INSERTION LOSS: 2.0 dB MAX
 RIPPLE: 0.5 dB MAX
 3dBc BANDWIDTH: ±3.5 KHz MIN
 40dBc BANDWIDTH: 25 KHz MAX
 ULTIMATE ATTENUATION: 50 dBc MIN
 MAX. POWER IN: +0 dBm
 OPERATING TEMPERATURE : -40°C to +85°C


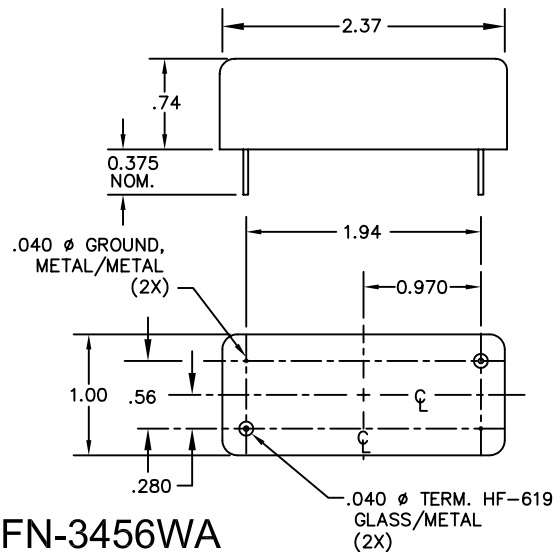


FN-3456WA

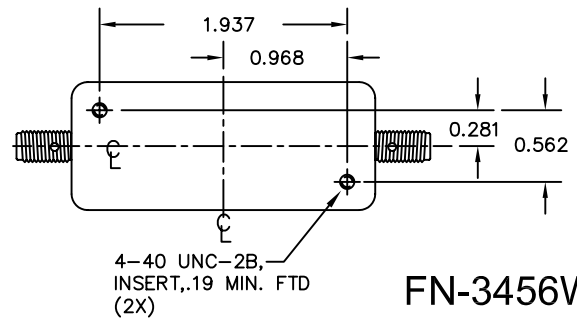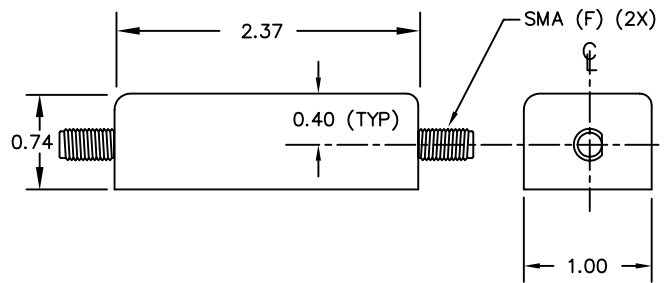

FN-3456WJ

FN-3456WK

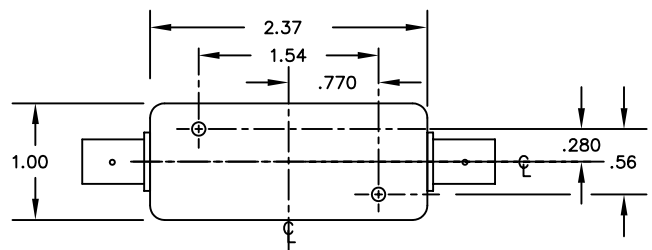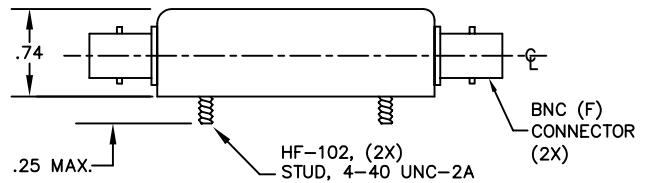

FN-3456W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
 .XXX = ± .010

ANGLE = ± 1°
 HOLES = ± .002

REVISED 05/28/2014