


Center Frequency
 3 dB Band Width:
 Insertion Loss:
 Return Loss:
 Pass Band Ripple:

Attenuation
 Phase Linearity:
 Input Power:
 Impedance: 50 Ohms
 Operating Temperature:
 Storage Temperature:
 Workmanship:
 RoHS Compliant
 Customer Installation Temperature Case temperature not to exceed +170°C.

(Fo) 160 MHz
 1.7 MHz Nominal
 22dB ± 2 dB
 Fo ±0.85MHz 9.5 dB Min
 ± 0.5 dB Max
 Fo ±3.7 MHz to Fo ±8MHz 45 dB Min / 50 dB Goal
 Fo ± 0.85 MHz 5°p-p
 0 dBm Max

-40°C to +85°C
 -55°C to +125°C
 J-STD-001
 NO

FN-4504W

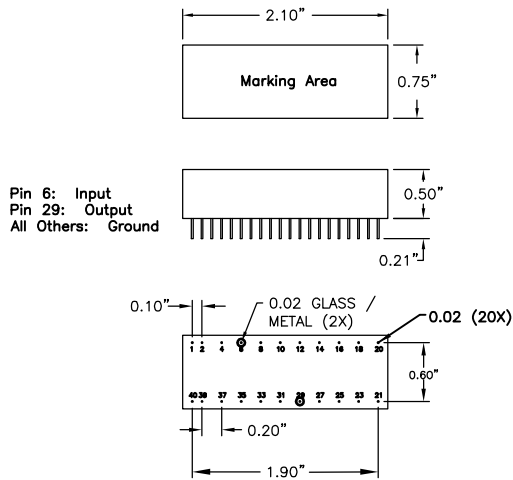

FN-4504W

FILTRONETICS, INC.

6010 PARRETTA DR. KANSAS CITY, MO
 64120 816-231-7375 FAX 816-241-0368
 WWW.FILTRO.NET